

LED MADA®

Uždaroji akcinė bendrovė

Įmonės kodas 303287697, PVM mokėtojo kodas LT100008526416

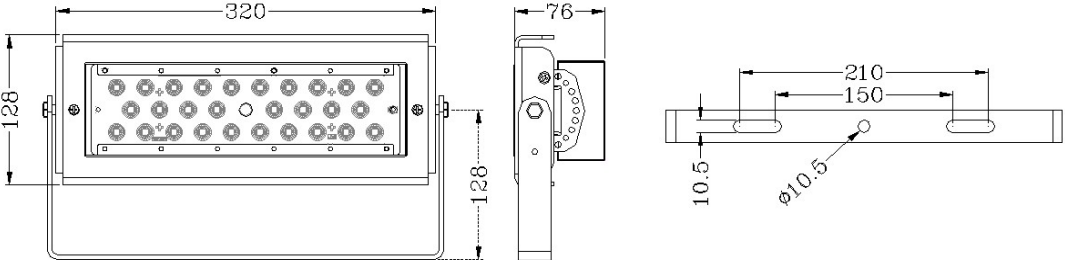
Kalvarijų g. 125 korp. 3, LT-08221 Vilnius, Lietuva

Tel. +370-680-90900, +370-653-88885

el. p. ledmada@gmail.com, web: www.ledmada.lt

Sąskaita LT947300010138949797, bankas „Swedbank“ AB, Vilnius SWIFT: HABA LT 22

MODEL LINEAR-1 50W

				
				
Part NO	LINEAR-1PW	LINEAR-1NW	LINEAR-1WW	
Parameter				
Input voltage	AC100V~240V 50/60HZ			
System consumption(W)	50	50	50	
Luminous flux(lm)	8000	7600	6800	
Chip Brand	CREE J Series 5050/ LUMILEDS LUXEON 5050	CREE J Series 5050/ LUMILEDS LUXEON 5050	CREE J Series 5050/ LUMILEDS LUXEON 5050	
Beam Angle	25°, 60°, 90°	25°, 60°, 90°	25°, 60°, 90°	
CRI	> 75			
Color Temperature	WW:2700-3200K / NW:4000-4500K / PW:5000-6500K			
LED Driver	MEAN WELL ELG-75 / HLG-60H			
Luminous efficiency(lm/w)	> 160			
Lifespan(hrs.)	> 50000			
IP Rating	IP66			
Dimmable	YES & NO	YES & NO	YES & NO	
Size(mm)	320*128*76	320*128*76	320*128*76	
Net Weigh(kg)	2.6	2.6	2.6	
Package Size(mm)	246*390*135	246*390*135	246*390*135	
Package Quantity (Pcs)	1	1	1	



Uždaroji akcinė bendrovė

Įmonės kodas 303287697, PVM mokėtojo kodas LT100008526416

Kalvarijų g. 125 korp. 3, LT-08221 Vilnius, Lietuva

Tel. +370-680-90900, +370-653-88885

el. p. ledmada@gmail.com, web: www.ledmada.lt

Sąskaita LT947300010138949797, bankas „Swedbank“ AB, Vilnius SWIFT: HABA LT 22

Gross Weigh(kg)	3.2	3.2	3.2
APPLICATION • It is applicable to playground lighting, warehouse lighting, plaza lighting, tunnel lighting and so on. • New Installation or Replace the traditional High Pressure Sodium Lamp, High Pressure Mercury Lamp, and Metal Halide Street Lamps. Etc.			
FEATURES • Adoption exclusive Lens with light transmittance up to 98%. • Perfect Light Distribution Solution: Adoption of integrated shell optic lens, enhance the brightness and illumination uniformity. • There are 25°, 60°, 90°, beam angle options for the Lens. • Scientifically-designed heat dissipater with much better cooling effect. • High luminous efficiency, Whole lamp output light efficiency >150LM/W. • High quality power supply, input voltage 100-240V. The power efficiency is more than 90%, power factor greater than 0.98, UL compulsory certification. • For the traditional light source such as the High-Pressure Sodium, if the voltage fluctuation $\pm 7\%$, the brightness and lifetime will be reduced very fast, but for this product, even the voltage fluctuation is $\pm 20\%$, the brightness and lifetime will not be influenced at all; Over Current, Over Voltage, Over Heat, Thunder Protection. • Impact Resistance, Shock-proof, Without Ultraviolet (UV) and Infrared (IR) Radiation: No filament and glass frames, avoid break of the traditional lamp, without harm to the human body. • The CCT of Warm white, Neutral white, Pure white to meet the needs of different occasions, eliminated the low color temperature of the sodium lamp which cause the depressed mood, observers will feel more comfortable.			

LED MADA®

Uždaroji akcinė bendrovė

Įmonės kodas 303287697, PVM mokėtojo kodas LT100008526416

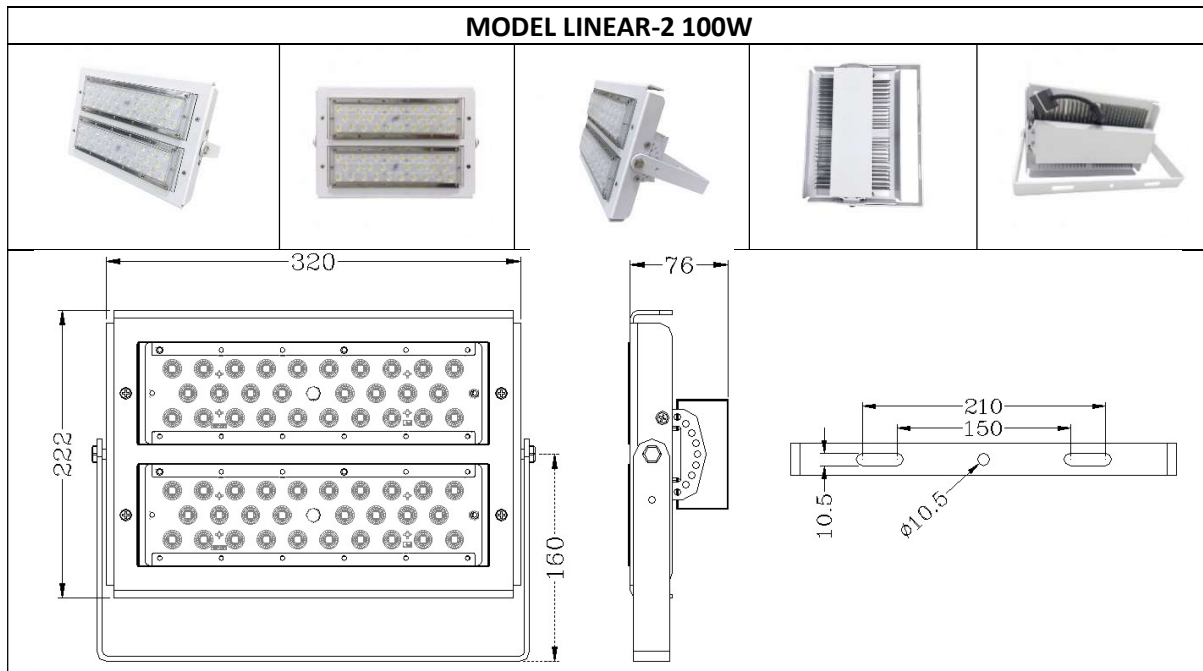
Kalvarijų g. 125 korp. 3, LT-08221 Vilnius, Lietuva

Tel. +370-680-90900, +370-653-88885

el. p. ledmada@gmail.com, web: www.ledmada.lt

Sąskaita LT947300010138949797, bankas „Swedbank“ AB, Vilnius SWIFT: HABA LT 22

MODEL LINEAR-2 100W



Part NO	LINEAR-2PW		LINEAR-2NW	LINEAR-2WW
Parameter				
Input voltage	AC100V~240V 50/60HZ			
System consumption(W)	100	100	100	
Luminous flux(lm)	16000	14800	13500	
Chip Brand	CREE J Series 5050/ LUMILEDS LUXEON 5050	CREE J Series 5050/ LUMILEDS LUXEON 5050	CREE J Series 5050/ LUMILEDS LUXEON 5050	
Beam Angle	25°, 60°, 90°	25°, 60°, 90°	25°, 60°, 90°	
CRI	>75			
Color Temperature	WW:2700-3200K / NW:4000-4500K / PW:5000-6500K			
LED Driver	MEAN WELL ELG-100 / HLG-75H			
Luminous efficiency(lm/w)	>160			
Lifespan(hrs.)	>50000			
IP Rating	IP66			
Dimmable	YES & NO	YES & NO	YES & NO	
Size(mm)	320*222*76	320*222*76	320*222*76	



Uždaroji akcinė bendrovė

Įmonės kodas 303287697, PVM mokėtojo kodas LT100008526416

Kalvarijų g. 125 korp. 3, LT-08221 Vilnius, Lietuva

Tel. +370-680-90900, +370-653-88885

el. p. ledmada@gmail.com, web: www.ledmada.lt

Sąskaita LT947300010138949797, bankas „Swedbank“ AB, Vilnius SWIFT: HABA LT 22

Net Weigh(kg)	3.5	3.5	3.5
Package Size(mm)	326*390*135	326*390*135	326*390*135
Package Quantity (Pcs)	1	1	1
Gross Weigh(kg)	4.1	4.1	4.1

APPLICATION

- It is applicable to playground lighting, warehouse lighting, plaza lighting, tunnel lighting and so on.
- New Installation or Replace the traditional High Pressure Sodium Lamp, High Pressure Mercury Lamp, and Metal Halide Street Lamps. Etc.

FEATURES

- Adoption exclusive Lens with light transmittance up to 98%.
- Perfect Light Distribution Solution: Adoption of integrated shell optic lens, enhance the brightness and illumination uniformity.
- There are 25°, 60°, 90°, beam angle options for the Lens.
- Scientifically-designed heat dissipater with much better cooling effect.
- High luminous efficiency. Whole lamp output light efficiency >150LM/W.
- High quality power supply, input voltage 100-240V. The power efficiency is more than 90%, power factor greater than 0.98, UL compulsory certification.
- For the traditional light source such as the High-Pressure Sodium, if the voltage fluctuation $\pm 7\%$, the brightness and lifetime will be reduced very fast, but for this product, even the voltage fluctuation is $\pm 20\%$, the brightness and lifetime will not be influenced at all; Over Current, Over Voltage, Over Heat, Thunder Protection.
- Impact Resistance, Shock-proof, Without Ultraviolet (UV) and Infrared (IR) Radiation: No filament and glass frames, avoid break of the traditional lamp, without harm to the human body.
- The CCT of Warm white, Neutral white, Pure white to meet the needs of different occasions, eliminated the low color temperature of the sodium lamp which cause the depressed mood, observers will feel more comfortable.

LED MADA®

Uždaroji akcinė bendrovė

Įmonės kodas 303287697, PVM mokėtojo kodas LT100008526416

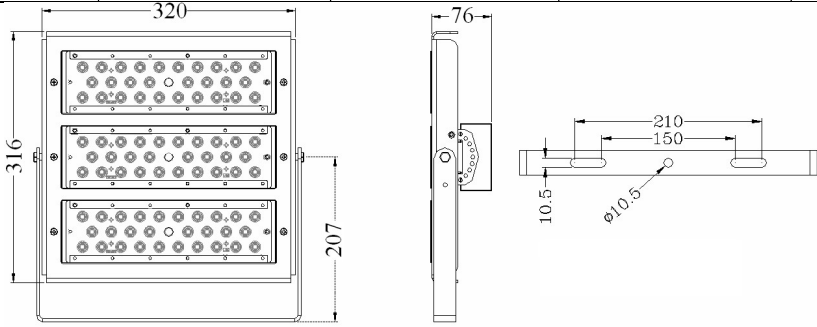
Kalvarijų g. 125 korp. 3, LT-08221 Vilnius, Lietuva

Tel. +370-680-90900, +370-653-88885

el. p. ledmada@gmail.com, web: www.ledmada.lt

Sąskaita LT947300010138949797, bankas „Swedbank“ AB, Vilnius SWIFT: HABA LT 22

MODEL LINEAR-3 150W

				
				
Part NO	LINEAR-3PW	LINEAR-3NW	LINEAR-3WW	
Parameter				
Input voltage	AC100V~240V 50/60HZ			
System consumption(W)	150	150	150	
Luminous flux(lm)	24000	22200	19800	
Chip Brand	CREE J Series 5050/ LUMILEDS LUXEON 5050	CREE J Series 5050/ LUMILEDS LUXEON 5050	CREE J Series 5050/ LUMILEDS LUXEON 5050	
Beam Angle	25°, 60°, 90°	25°, 60°, 90°	25°, 60°, 90°	
CRI	> 75			
Color Temperature	WW:2700-3200K / NW:4000-4500K / PW:5000-6500K			
LED Driver	MEAN WELL ELG-150 / HLG-150H			
Luminous efficiency(lm/w)	> 160			
Lifespan(hrs)	> 50000			
IP Rating	IP66			
Dimmable	YES & NO	YES & NO	YES & NO	
Size(mm)	320*316*76	320*316*76	320*316*76	
Net Weigh(kg)	4.5	4.5	4.5	



Uždaroji akcinė bendrovė

Įmonės kodas 303287697, PVM mokėtojo kodas LT100008526416

Kalvarijų g. 125 korp. 3, LT-08221 Vilnius, Lietuva

Tel. +370-680-90900, +370-653-88885

el. p. ledmada@gmail.com, web: www.ledmada.lt

Sąskaita LT947300010138949797, bankas „Swedbank“ AB, Vilnius SWIFT: HABA LT 22

Package Size(mm)	420*390*135	420*390*135	420*390*135
Package Quantity (Pcs)	1	1	1
Gross Weigh(kg)	5.2	5.2	5.2

APPLICATION

- It is applicable to playground lighting, warehouse lighting, plaza lighting, tunnel lighting and so on.
- New Installation or Replace the traditional High Pressure Sodium Lamp, High Pressure Mercury Lamp, and Metal Halide Street Lamps. Etc.

FEATURES

- Adoption exclusive Lens with light transmittance up to 98%.
- Perfect Light Distribution Solution: Adoption of integrated shell optic lens, enhance the brightness and illumination uniformity.
- There are 25°, 60°, 90°, beam angle options for the Lens.
- Scientifically-designed heat dissipater with much better cooling effect.
- High luminous efficiency, Whole lamp output light efficiency >150LM/W.
- High quality power supply, input voltage 100-240V. The power efficiency is more than 90%, power factor greater than 0.98, UL compulsory certification.
- For the traditional light source such as the High-Pressure Sodium, if the voltage fluctuation $\pm 7\%$, the brightness and lifetime will be reduced very fast, but for this product, even the voltage fluctuation is $\pm 20\%$, the brightness and lifetime will not be influenced at all; Over Current, Over Voltage, Over Heat, Thunder Protection.
- Impact Resistance, Shock-proof, Without Ultraviolet (UV) and Infrared (IR) Radiation: No filament and glass frames, avoid break of the traditional lamp, without harm to the human body.
- The CCT of Warm white, Neutral white, Pure white to meet the needs of different occasions, eliminated the low color temperature of the sodium lamp which cause the depressed mood, observers will feel more comfortable.

LED MADA®

Uždaroji akcinė bendrovė

Įmonės kodas 303287697, PVM mokėtojo kodas LT100008526416

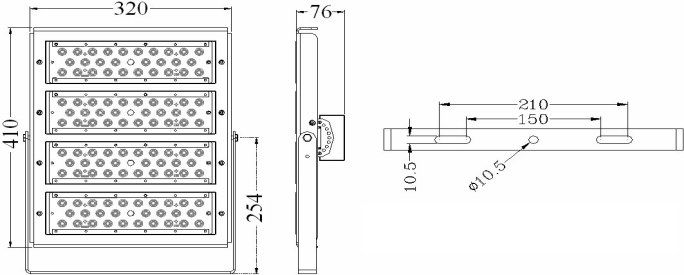
Kalvarijų g. 125 korp. 3, LT-08221 Vilnius, Lietuva

Tel. +370-680-90900, +370-653-88885

el. p. ledmada@gmail.com, web: www.ledmada.lt

Sąskaita LT947300010138949797, bankas „Swedbank“ AB, Vilnius SWIFT: HABA LT 22

MODEL LINEAR-4 200W

				
				
Part NO	LINEAR-4PW	LINEAR-4NW	LINEAR-4WW	
Parameter				
Input voltage	AC100V~240V 50/60HZ			
System consumption(W)	200	200	200	
Luminous flux(lm)	32000	29600	26500	
Chip Brand	CREE J Series 5050/ LUMILEDS LUXEON 5050	CREE J Series 5050/ LUMILEDS LUXEON 5050	CREE J Series 5050/ LUMILEDS LUXEON 5050	
Beam Angle	25°, 60°, 90°	25°, 60°, 90°	25°, 60°, 90°	
CRI	> 75			
Color Temperature	WW:2700-3200K / NW:4000-4500K / PW:5000-6500K			
LED Driver	MEAN WELL ELG-200 / HLG-240H			
Luminous efficiency(lm/w)	> 160			
Lifespan(hrs)	> 50000			
IP Rating	IP66			
Dimmable	YES & NO	YES & NO	YES & NO	
Size(mm)	320*410*76	320*410*76	320*410*76	
Net Weigh(kg)	5.6	5.6	5.6	
Package Size(mm)	514*390*135	514*390*135	514*390*135	



Uždaroji akcinė bendrovė

Įmonės kodas 303287697, PVM mokėtojo kodas LT100008526416

Kalvarijų g. 125 korp. 3, LT-08221 Vilnius, Lietuva

Tel. +370-680-90900, +370-653-88885

el. p. ledmada@gmail.com, web: www.ledmada.lt

Sąskaita LT947300010138949797, bankas „Swedbank“ AB, Vilnius SWIFT: HABA LT 22

Package Quantity (Pcs)	1	1	1
Gross Weigh(kg)	6.2	6.2	6.2

APPLICATION

- It is applicable to playground lighting, warehouse lighting, plaza lighting, tunnel lighting and so on.
- New Installation or Replace the traditional High Pressure Sodium Lamp, High Pressure Mercury Lamp, and Metal Halide Street Lamps. Etc.

FEATURES

- Adoption exclusive Lens with light transmittance up to 98%.
- Perfect Light Distribution Solution: Adoption of integrated shell optic lens, enhance the brightness and illumination uniformity.
- There are 25°, 60°, 90°, beam angle options for the Lens.
- Scientifically-designed heat dissipater with much better cooling effect.
- High luminous efficiency. Whole lamp output light efficiency >150LM/W.
- High quality power supply, input voltage 100-240V. The power efficiency is more than 90%, power factor greater than 0.98, UL compulsory certification.
- For the traditional light source such as the High-Pressure Sodium, if the voltage fluctuation $\pm 7\%$, the brightness and lifetime will be reduced very fast, but for this product, even the voltage fluctuation is $\pm 20\%$, the brightness and lifetime will not be influenced at all; Over Current, Over Voltage, Over Heat, Thunder Protection.
- Impact Resistance, Shock-proof, Without Ultraviolet (UV) and Infrared (IR) Radiation: No filament and glass frames, avoid break of the traditional lamp, without harm to the human body.
- The CCT of Warm white, Neutral white, Pure white to meet the needs of different occasions, eliminated the low color temperature of the sodium lamp which cause the depressed mood, observers will feel more comfortable.

LED MADA®

Uždaroji akcinė bendrovė

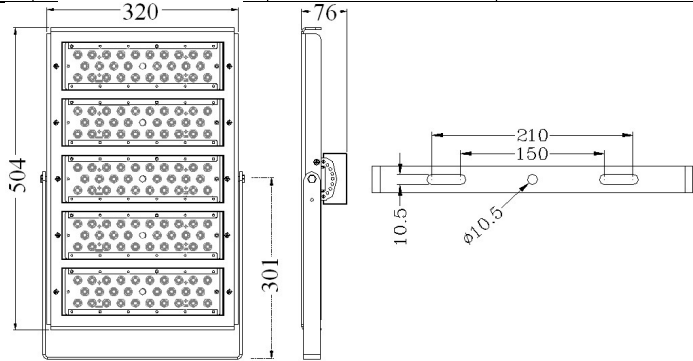
Įmonės kodas 303287697, PVM mokėtojo kodas LT100008526416

Kalvarijų g. 125 korp. 3, LT-08221 Vilnius, Lietuva

Tel. +370-680-90900, +370-653-88885

el. p. ledmada@gmail.com, web: www.ledmada.lt

Sąskaita LT947300010138949797, bankas „Swedbank“ AB, Vilnius SWIFT: HABA LT 22

MODEL LINEAR-5 250W				
				
				
Part NO	LINEAR-5PW	LINEAR-5NW	LINEAR-5WW	
Parameter				
Input voltage	AC100V~240V 50/60HZ			
System consumption(W)	250	250	250	
Luminous flux(lm)	40000	37000	33500	
Chip Brand	CREE J Series 5050/ LUMILEDS LUXEON 5050	CREE J Series 5050/ LUMILEDS LUXEON 5050	CREE J Series 5050/ LUMILEDS LUXEON 5050	
Beam Angle	25°, 60°, 90°	25°, 60°, 90°	25°, 60°, 90°	
CRI	>75			
Color Temperature	WW:2700-3200K / NW:4000-4500K / PW:5000-6500K			
LED Driver	MEAN WELL ELG-240 / HLG-240H			
Luminous efficiency(lm/w)	>160			
Lifespan(hrs)	>50000			
IP Rating	IP66			
Dimmable	YES & NO	YES & NO	YES & NO	
Size(mm)	320*504*76	320*504*76	320*504*76	
Net Weigh(kg)	6.4	6.4	6.4	



Uždaroji akcinė bendrovė

Įmonės kodas 303287697, PVM mokėtojo kodas LT100008526416

Kalvarijų g. 125 korp. 3, LT-08221 Vilnius, Lietuva

Tel. +370-680-90900, +370-653-88885

el. p. ledmada@gmail.com, web: www.ledmada.lt

Sąskaita LT947300010138949797, bankas „Swedbank“ AB, Vilnius SWIFT: HABA LT 22

Package Size(mm)	608*390*135	608*390*135	608*390*135
Package Quantity (Pcs)	1	1	1
Gross Weigh(kg)	7.4	7.4	7.4

APPLICATION

- It is applicable to playground lighting, warehouse lighting, plaza lighting, tunnel lighting and so on.
- New Installation or Replace the traditional High Pressure Sodium Lamp, High Pressure Mercury Lamp, and Metal Halide Street Lamps. Etc.

FEATURES

- Adoption exclusive Lens with light transmittance up to 98%.
- Perfect Light Distribution Solution: Adoption of integrated shell optic lens, enhance the brightness and illumination uniformity.
- There are 25°, 60°, 90°, beam angle options for the Lens.
- Scientifically-designed heat dissipater with much better cooling effect.
- High luminous efficiency, Whole lamp output light efficiency >150LM/W.
- High quality power supply, input voltage 100-240V. The power efficiency is more than 90%, power factor greater than 0.98, UL compulsory certification.
- For the traditional light source such as the High-Pressure Sodium, if the voltage fluctuation $\pm 7\%$, the brightness and lifetime will be reduced very fast, but for this product, even the voltage fluctuation is $\pm 20\%$, the brightness and lifetime will not be influenced at all; Over Current, Over Voltage, Over Heat, Thunder Protection.
- Impact Resistance, Shock-proof, Without Ultraviolet (UV) and Infrared (IR) Radiation: No filament and glass frames, avoid break of the traditional lamp, without harm to the human body.
- The CCT of Warm white, Neutral white, Pure white to meet the needs of different occasions, eliminated the low color temperature of the sodium lamp which cause the depressed mood, observers will feel more comfortable.