



Uždaroji akcinė bendrovė

Įmonės kodas 303287697, PVM mokėtojo kodas LT100008526416

Kalvarijų g. 125 korp. 3, LT-08221 Vilnius, Lietuva

Tel. +370-680-90900, +370-653-88885

el. p. ledmada@gmail.com, web: www.ledmada.lt

Sąskaita LT947300010138949797, bankas „Swedbank“ AB, Vilnius, SWIFT: HABA LT 22

---

# Specifications

Product Name: LED Constant Current Power Supply

Product Model: HG-WP2280

Product Specification: 25-36V/2.25A

## 一、 KEY FEATURES

Input range:100-265VAC

Built-in active PFC function

Free Air Convection

High efficiency up to 90%

No load power consumption<2W

Protections: short circuit/overload/over voltage/

Over temperature

IP67 design for outdoor installations

Dimension: 180\*68\*40MM

non flicker power drivers

5-Years Product Warranty

# LED MADA®

Uždaroji akcinė bendrovė

Įmonės kodas 303287697, PVM mokėtojo kodas LT100008526416

Kalvarijų g. 125 korp. 3, LT-08221 Vilnius, Lietuva

Tel. +370-680-90900, +370-653-88885

el. p. ledmada@gmail.com, web: www.ledmada.lt

Sąskaita LT947300010138949797, bankas „Swedbank“ AB, Vilnius, SWIFT: HABA LT 22

## Model List

Model	Output Current	Output Voltage Range	No load output voltage	Efficiency	Power Factor
HG-WP2280	2.25A	25V-36V	45Vmax	90%	$\geq 0.95$



# LED MADA®

Uždaroji akcinė bendrovė

Įmonės kodas 303287697, PVM mokėtojo kodas LT100008526416

Kalvarijų g. 125 korp. 3, LT-08221 Vilnius, Lietuva

Tel. +370-680-90900, +370-653-88885

el. p. ledmada@gmail.com, web: www.ledmada.lt

Šąskaita LT947300010138949797, bankas „Swedbank“ AB, Vilnius, SWIFT: HABA LT 22

## 二、ELECTRICAL SPECIFICATIONS

Parameter Note.1		Specification
Input	Range of input voltage	100-265VAC
	Frequency (Hz)	50-63 Hz
	Inrush Current	65A <sub>max.</sub> @Full Load,230VAC, Cold Start
	Input Current max	2.25A <sub>max.</sub> @Full Load,100VAC
	Start-up time	<2S @Full Load,230VAC
	No Load Power Consumption	<2W @230VAC
	Power Factor	PF ≥ 0.95 @Full Load,230VAC
	THD	20%MAX@70%-100%Load,100-265VAC

Output	Output Current	2250mA . @100-265VAC
	Output Voltage	25-36VDC
	Current Accuracy	± 5%
	Line Regulation	± 3%
	Load Regulation	≤ 5% @Full Load,100-265VAC
	Hold-up Time	10ms Min
	Ripple & Noise(max)Note.2	10% (Pk-Pk)
	Efficiency (Type)	90% @Full Load,230VAC;

Protection	Over Load Protection	Protection type: Auto recovery
	Over Voltage Protection	Protection type: Auto recovery
	Short circuit Protection	Protection type: Hiccup, Auto recovery
	Over Temperature	Protection type: Auto recovery

Safety&EMC	Safety standards	EN61347-1:2015 EN61347-2-13:2014
	Input-Output(V.AC)	3000V/5mA/1min
	Input-FG(V.AC) <sup>Note.3</sup>	1500V/5mA/1min
	Output-FG(V.AC)	NA
	Leakage Current	<0.7 mA(240VAC)

# LED MADA®

Uždaroji akcinė bendrovė

Įmonės kodas 303287697, PVM mokėtojo kodas LT100008526416

Kalvarijų g. 125 korp. 3, LT-08221 Vilnius, Lietuva

Tel. +370-680-90900, +370-653-88885

el. p. ledmada@gmail.com, web: www.ledmada.lt

Šąskaita LT947300010138949797, bankas „Swedbank“ AB, Vilnius, SWIFT: HABA LT 22

	Input-Output(V.AC)	$\geq 4 \text{ M } \Omega @ 500 \text{VDC}$
	Input-FG(V.AC)	$\geq 2 \text{ M } \Omega @ 500 \text{VDC}$
	Output-FG(V.AC)	$\geq 2 \text{ M } \Omega @ 500 \text{VDC}$
	EMI(Conducted&Radiated Emission)Note.4	EN55015:2013+A1:2015 EN61000-3-2:2014 EN61000-3-3:2013
	EMS	EN61547:2009

Environment	Working Temperature	Ta=-40°C...+60°C (Refer to output load derating curve)
	Max. Case Temperature Tc	Tc=+85°C
	Case temperature on warranty	Tc: -40°C...+75°C
	Cooling condition	Free Air Convection
	Storage Temperature	-25°C...+80°C
	Life Time	50000Hrs@Full Load,230VAC,Tc=75°C
	Humidity	20-90%RH
	MTBF	>250,000h@25°C (MIL-HDBK-217F)
	Vibration	10-500Hz,2G10min./1cycle,60min.eachalongX,Y,Zaxes
	Dimension	180*68*40
Weight	0.86Kg&1PCS	

Note	<p>Note.1:All parameter NOT specially mentioned are measured are rated input or max rated input ,and 25°C of ambient temperature.Note.2:Ripple &amp; Noise are measured at 20MHz of bandwidth by using a 300mm twisted pair-wire terminated with a 0.1uF parallel capacitor.Note.3:Please remove gas discharge tube on input end when do input hi-pot tests to ground to avoid functional movement of gas discharge tube.</p> <p>Note.4:Please confirm EMI with whole system ,only driver can pass EMI standard,.</p>
------	---

# LED MADA®

Uždaroji akcinė bendrovė

Įmonės kodas 303287697, PVM mokėtojo kodas LT100008526416


Kalvarijų g. 125 korp. 3, LT-08221 Vilnius, Lietuva

Tel. +370-680-90900, +370-653-88885


el. p. ledmada@gmail.com, web: www.ledmada.lt

Sąskaita LT947300010138949797, bankas „Swedbank“ AB, Vilnius, SWIFT: HABA LT 22


### Derating Curve

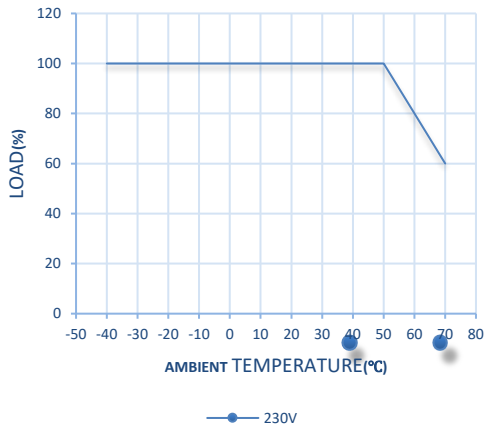

### Input VS Load

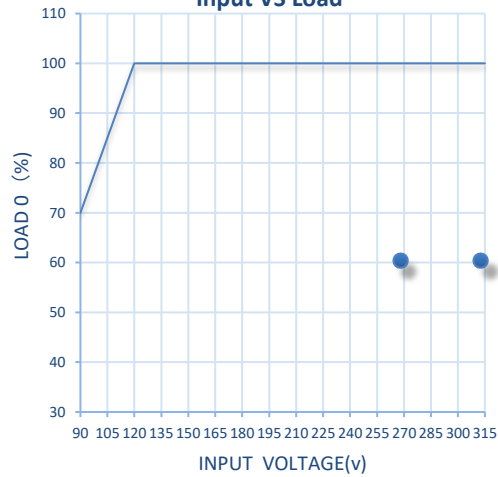

### life time

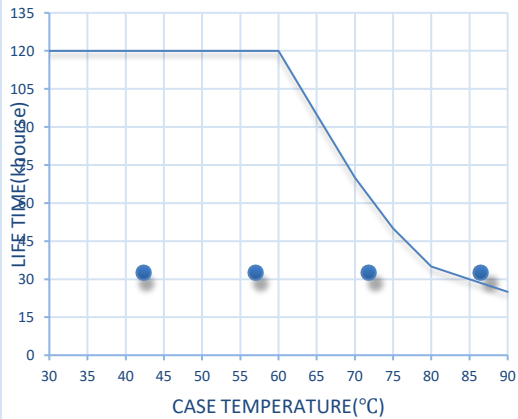

### PF CURVE

