

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		2844.4 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		-1.0 degrees horizontal
Beam Spread	At 10% of Imax	56.4V x 56.5H
	At 50% of Imax	32.7V x 32.8H
	At 90% of Imax	12.0V x 12.3H
Beam Flux	Total	1000.4 lumens per klm.
	To 10% of Imax	880.8 lumens per klm.
	To 50% of Imax	515.8 lumens per klm.
	To 90% of Imax	101.1 lumens per klm.
	Upward LOR	0.0 %
	Downward LOR	100.0 %
Luminaire Efficiency (Light Output Ratio)		100.0 %

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2025-05-28

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 10.000m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.02V I:0.5023A P:110.06W PF:0.9960 Freq:60.04Hz Lamp Flux:15839.1x1 lm		
NAME: PS 100 PRO CR 35 50 7 030	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

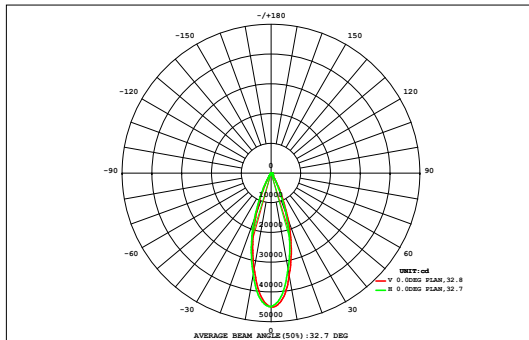

DATA OF LAMP		Eff:143.91lm/W	
MODEL	PS 100 PRO CR 35 50 7 030	Imax(cd)	45053
NOMINAL POWER(W)	110.06	AVAILABILITY(%)	88.0
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	13941
NOMINAL FLUX(lm)	15839.1	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	15839
TEST VOLTAGE(V)	220	θ @50% (H,V)	33,33DEG

VERTICAL(DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.01	0.03	0.06	0.10	0.14	0.20	0.25	0.30	0.32	0.32	0.28	0.23	0.18	0.12	0.08	0.04	0.02	0.00	2.66	0.00
90	0.01	0.03	0.06	0.10	0.14	0.20	0.25	0.30	0.32	0.32	0.28	0.23	0.18	0.12	0.08	0.04	0.02	0.00	2.66	0.00
80	0.01	0.06	0.18	0.40	0.71	1.06	1.40	1.68	1.83	1.81	1.63	1.33	0.99	0.64	0.35	0.15	0.05	0.01	14.3	0.00
70	0.02	0.12	0.42	0.98	1.75	2.62	3.46	4.10	4.42	4.39	4.00	3.34	2.51	1.65	0.89	0.37	0.10	0.01	35.1	0.00
60	0.02	0.20	0.74	1.72	3.01	4.42	5.73	6.72	7.24	7.20	6.60	5.58	4.28	2.88	1.61	0.66	0.16	0.02	58.8	0.00
50	0.03	0.29	1.09	2.47	4.24	6.22	8.37	10.6	12.2	12.1	10.4	8.16	6.05	4.11	2.35	0.99	0.24	0.02	89.8	0.00
40	0.03	0.38	1.42	3.14	5.37	8.61	14.5	26.2	40.9	40.1	25.0	13.9	8.30	5.21	3.02	1.31	0.32	0.03	198	0.00
30	0.04	0.45	1.69	3.69	6.56	13.1	42.5	139	249	243	129	38.2	12.3	6.32	3.54	1.57	0.39	0.03	891	626
	0.04	0.51	1.89	4.09	7.89	22.6	132	437	723	709	411	117	20.1	7.43	3.90	1.75	0.45	0.03	2599	2443
	0.04	0.54	1.99	4.32	8.90	35.1	235	710	1165	1135	661	201	28.9	8.15	4.08	1.84	0.47	0.03	4201	4066
	0.04	0.54	1.99	4.32	8.85	34.5	230	695	1135	1113	653	199	28.3	8.10	4.07	1.83	0.47	0.03	4117	3981
	0.04	0.51	1.88	4.07	7.77	21.7	123	407	686	674	384	109	19.4	7.31	3.86	1.73	0.44	0.03	2451	2290
	0.04	0.45	1.67	3.66	6.44	12.5	37.7	125	225	220	116	33.7	11.7	6.17	3.48	1.55	0.39	0.03	806	533
-30	0.03	0.37	1.40	3.10	5.29	8.28	13.5	24.0	35.6	34.9	23.0	12.9	7.94	5.08	2.95	1.29	0.32	0.02	180	0.00
-40	0.03	0.28	1.06	2.42	4.17	6.08	8.15	10.2	11.6	11.5	10.1	7.94	5.87	4.00	2.30	0.97	0.24	0.02	86.9	0.00
-50	0.02	0.19	0.71	1.67	2.94	4.34	5.68	6.67	7.17	7.13	6.58	5.53	4.19	2.80	1.56	0.64	0.16	0.01	58.0	0.00
-60	0.01	0.12	0.40	0.94	1.69	2.56	3.40	4.03	4.34	4.31	3.95	3.28	2.43	1.57	0.85	0.35	0.09	0.01	34.3	0.00
-70	0.01	0.06	0.18	0.38	0.67	1.02	1.37	1.64	1.76	1.74	1.58	1.29	0.94	0.60	0.33	0.15	0.05	0.01	13.8	0.00
-80	0.01	0.03	0.06	0.09	0.14	0.20	0.26	0.29	0.31	0.30	0.27	0.23	0.17	0.12	0.07	0.04	0.02	0.00	2.61	0.00
-90	0.01	0.03	0.06	0.09	0.14	0.20	0.26	0.29	0.31	0.30	0.27	0.23	0.17	0.12	0.07	0.04	0.02	0.00	2.61	0.00
	-90	-80	-70	-60	-50	-40	-30	-20	HORIZONTAL(DEG)	20	30	40	50	60	70	80	90			
Φ t	0.47	5.13	18.8	41.6	76.5	185	866	2609	4310	4220	2446	762	165	72.2	39.3	17.2	4.38	0.35	15839	---
Φ a	0.00	0.00	0.00	0.00	0.00	0.00	605	2420	4135	4043	2257	482	0.00	0.00	0.00	0.00	0.00	0.00	---	13941

one-half-peak spread: U:16.0,D:16.9 , L:16.1,R:16.9


NEMA Beam Type: Type 4

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-05-28

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.02V I:0.5023A P:110.06W PF:0.9960 Freq:60.04Hz Lamp Flux:15839.1x1 lm		
NAME: PS 100 PRO CR 35 50 7 030	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

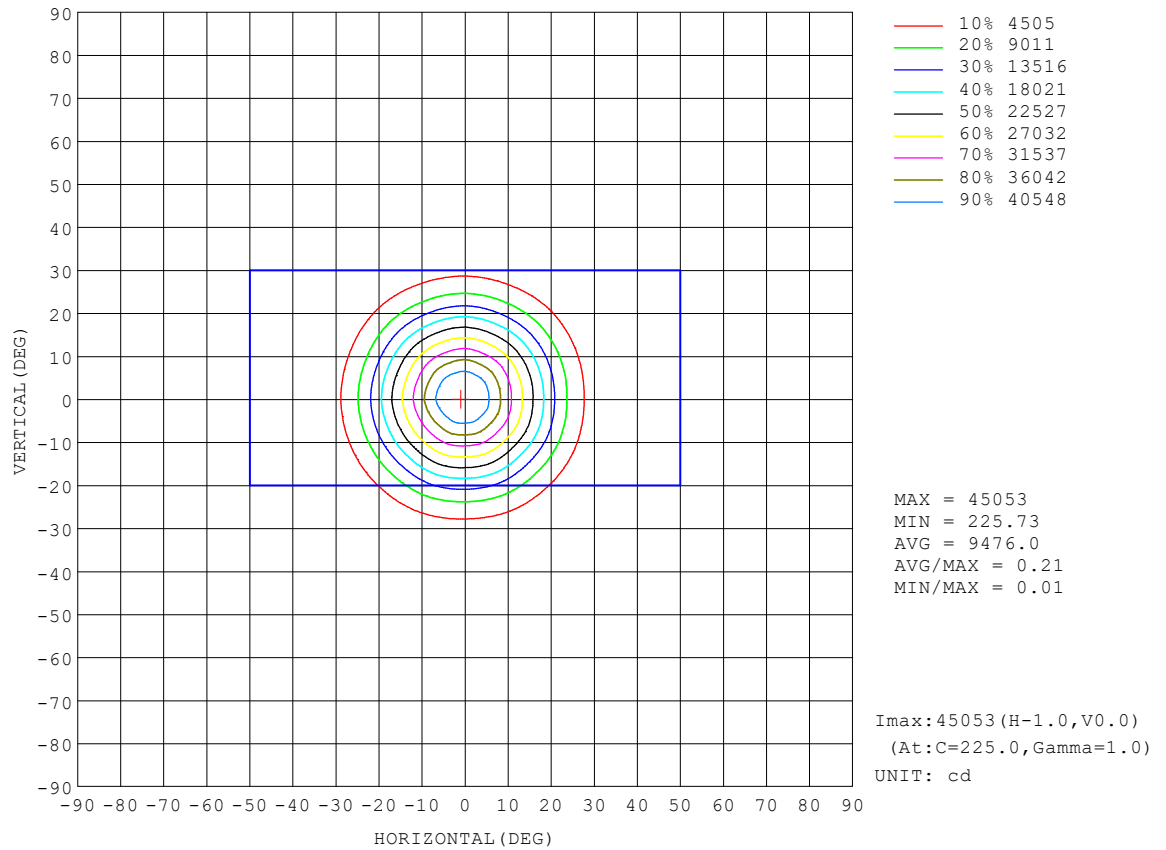


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-05-28

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 γ Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:220.02V I:0.5023A P:110.06W PF:0.9960 Freq:60.04Hz Lamp Flux:15839.1x1 lm		
NAME: PS 100 PRO CR 35 50 7 030	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

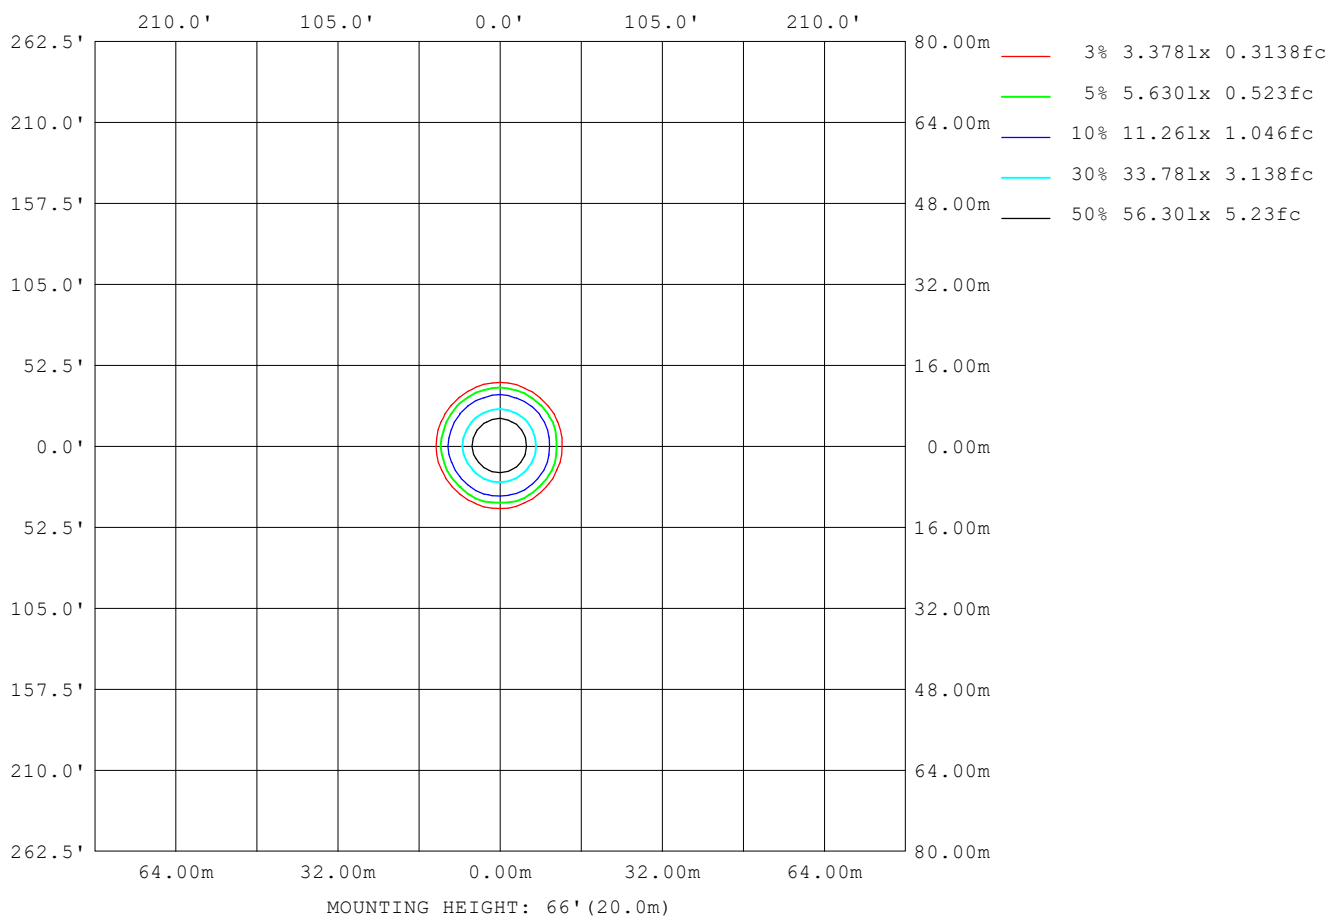

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-05-28

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks:

Planar Illuminance Curve

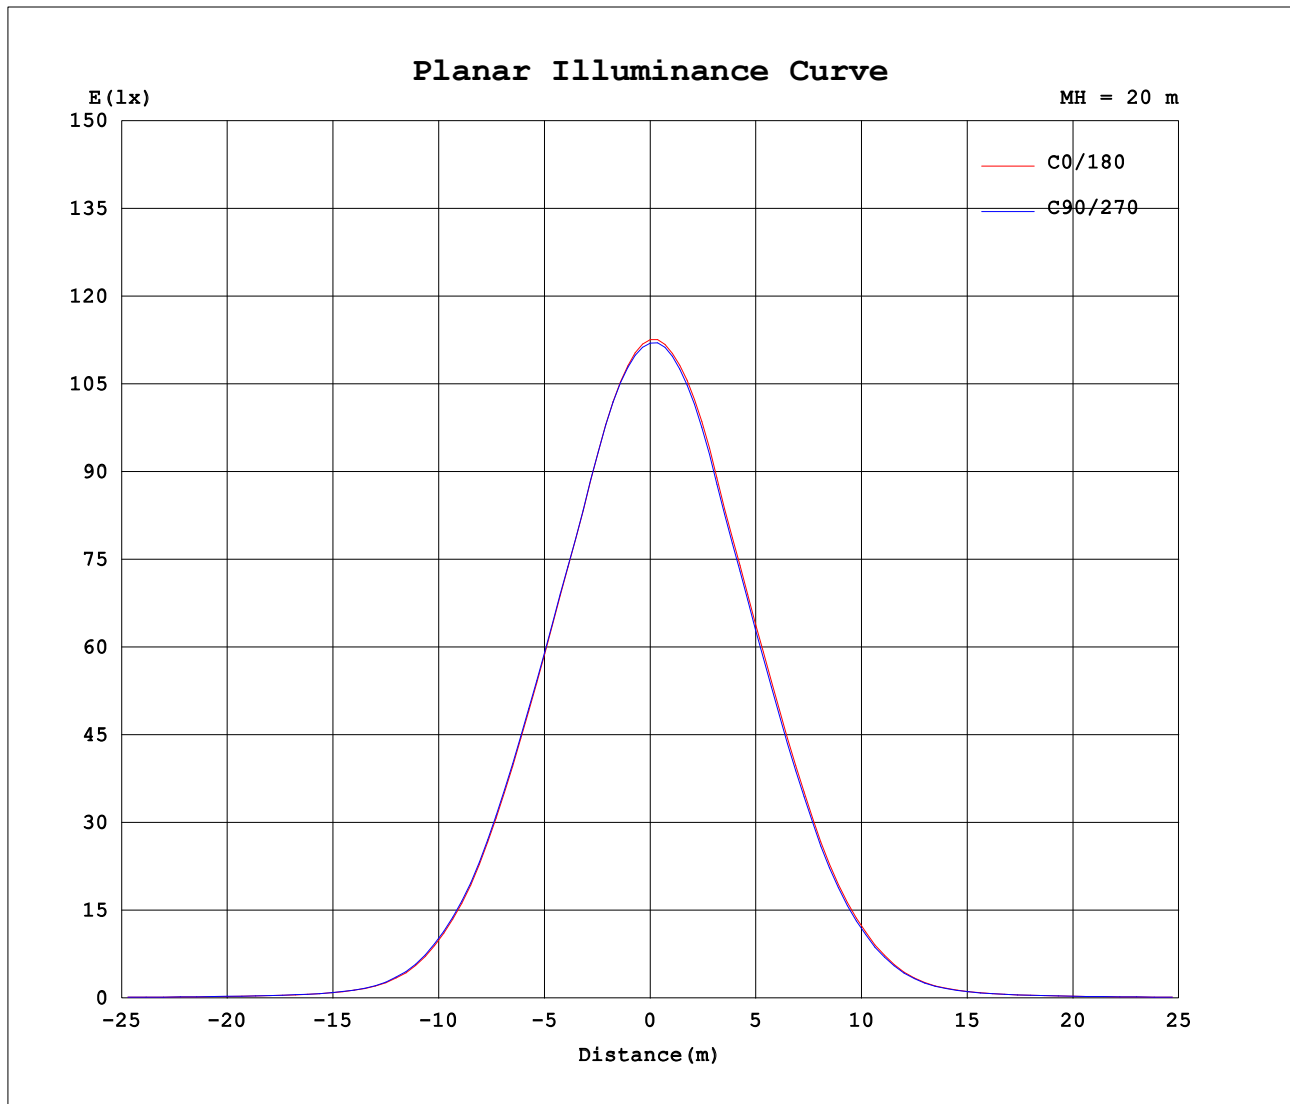


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2025-05-28

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 10.000m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.02V I:0.5023A P:110.06W PF:0.9960 Freq:60.04Hz Lamp Flux:15839.1x1 lm		
NAME: PS 100 PRO CR 35 50 7 030	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

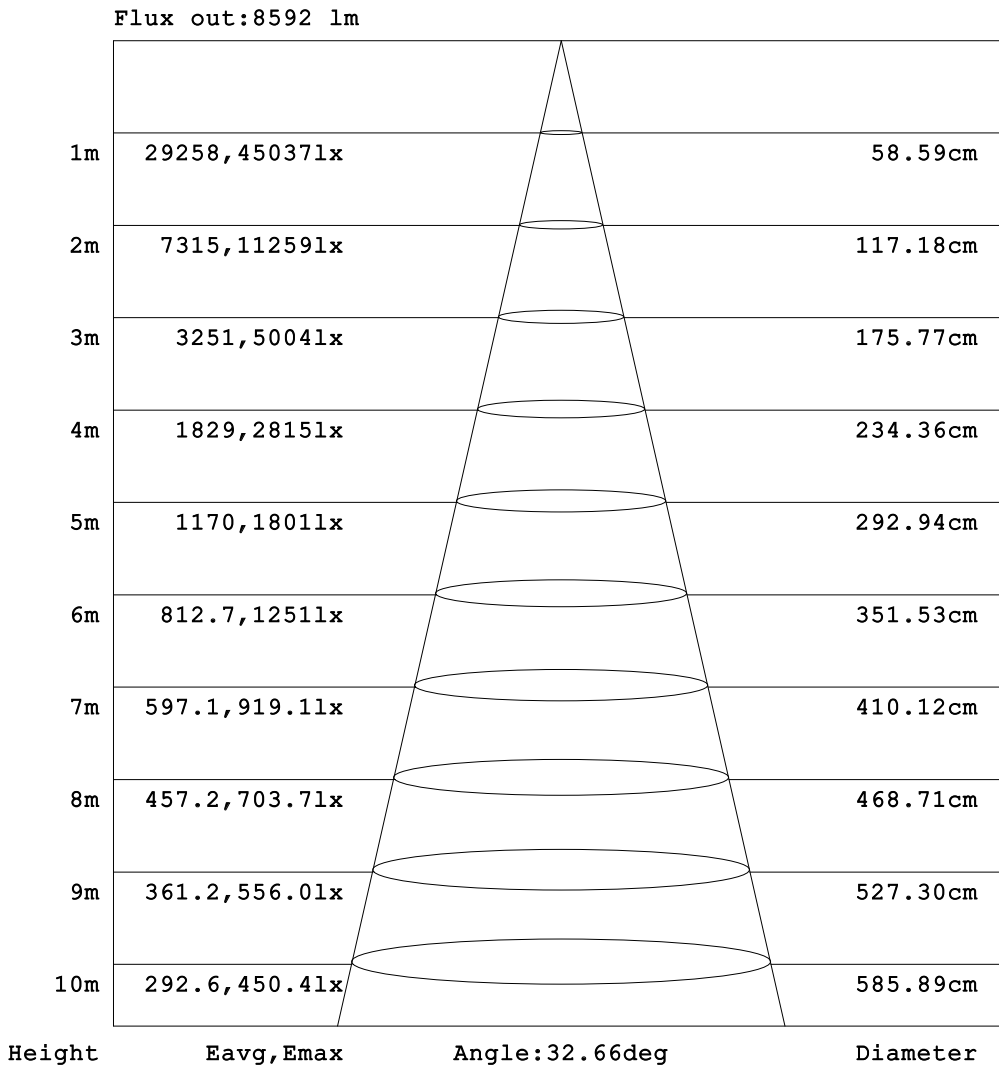

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-05-28

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.02V I:0.5023A P:110.06W PF:0.9960 Freq:60.04Hz Lamp Flux:15839.1x1 lm		
NAME: PS 100 PRO CR 35 50 7 030	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: ×10cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.13	0.14	0.15	0.17	0.18	0.18	0.18	0.17	0.16	0.16	0.16	0.17	0.18	0.19	0.19	0.18	0.17	0.16	0.16
-85	0.13	0.20	0.25	0.31	0.36	0.40	0.45	0.49	0.53	0.58	0.64	0.70	0.75	0.80	0.83	0.84	0.85	0.85	0.83
-80	0.13	0.25	0.37	0.49	0.63	0.77	0.93	1.10	1.29	1.48	1.69	1.89	2.10	2.28	2.43	2.53	2.59	2.61	2.60
-75	0.13	0.31	0.50	0.73	0.99	1.30	1.68	2.11	2.56	3.02	3.50	3.98	4.43	4.84	5.17	5.41	5.57	5.65	5.65
-70	0.13	0.37	0.66	1.01	1.47	2.07	2.77	3.52	4.32	5.14	5.99	6.82	7.61	8.31	8.90	9.32	9.60	9.74	9.74
-65	0.13	0.43	0.83	1.36	2.10	3.04	4.09	5.26	6.51	7.77	9.03	10.2	11.3	12.3	13.2	13.7	14.1	14.3	14.3
-60	0.13	0.50	1.01	1.77	2.85	4.14	5.64	7.30	9.01	10.7	12.3	13.8	15.2	16.5	17.6	18.3	18.8	19.0	19.0
-55	0.13	0.57	1.22	2.25	3.67	5.37	7.37	9.49	11.6	13.6	15.5	17.4	19.1	20.6	21.9	22.7	23.3	23.6	23.6
-50	0.13	0.64	1.43	2.77	4.53	6.71	9.16	11.7	14.1	16.6	18.8	21.0	22.9	24.6	26.1	27.3	28.2	28.8	28.9
-45	0.13	0.70	1.65	3.29	5.43	8.08	10.9	13.8	16.6	19.4	22.0	24.3	26.6	29.1	31.7	34.1	35.9	37.1	37.3
-40	0.13	0.76	1.90	3.81	6.35	9.41	12.6	15.8	19.0	22.0	24.8	27.9	31.6	35.9	40.9	45.9	50.1	53.4	53.8
-35	0.13	0.82	2.13	4.32	7.24	10.7	14.1	17.7	21.2	24.4	28.0	32.6	38.7	46.6	57.8	72.1	88.4	101	103
-30	0.13	0.88	2.36	4.79	8.07	11.8	15.6	19.4	23.0	26.8	31.8	39.0	49.4	66.9	101	152	218	270	280
-25	0.13	0.93	2.56	5.24	8.81	12.8	16.8	20.9	24.8	29.3	36.2	47.1	67.8	115	224	385	591	715	745
-20	0.13	0.97	2.74	5.62	9.45	13.6	17.9	22.1	26.4	32.2	41.6	59.6	104	228	466	811	1181	1442	1506
-15	0.13	1.00	2.88	5.94	9.97	14.3	18.8	23.2	27.9	35.0	47.3	75.5	161	405	828	1374	1931	2319	2411
-10	0.13	1.03	2.99	6.18	10.4	14.8	19.4	23.9	29.1	37.5	53.9	96.9	242	626	1225	1962	2632	3149	3288
-5	0.13	1.04	3.06	6.33	10.6	15.2	19.8	24.4	30.0	39.5	58.5	116	319	798	1548	2408	3198	3873	4125
0	0.13	1.05	3.09	6.40	10.7	15.3	20.0	24.6	30.4	40.5	60.4	125	357	880	1700	2626	3504	4274	4504
5	0.13	1.04	3.06	6.35	10.6	15.2	19.9	24.5	30.1	39.7	58.8	118	326	813	1577	2456	3282	4021	4242
10	0.13	1.03	3.00	6.21	10.4	14.9	19.5	24.0	29.3	37.9	54.4	99.7	254	646	1277	2057	2786	3267	3464
15	0.13	1.01	2.90	5.98	10.0	14.4	18.9	23.3	28.1	35.5	48.4	78.4	172	440	898	1504	2049	2430	2580
20	0.13	0.97	2.75	5.66	9.54	13.8	18.0	22.3	26.6	32.8	42.8	61.8	113	250	533	895	1263	1549	1661
25	0.13	0.93	2.57	5.29	8.91	12.9	17.0	21.0	25.0	29.8	37.3	49.3	73.4	131	250	437	633	791	851
30	0.13	0.88	2.38	4.85	8.18	11.9	15.8	19.6	23.3	27.2	32.7	40.7	52.9	74.0	113	171	248	314	341
35	0.13	0.83	2.15	4.37	7.37	10.8	14.4	17.9	21.4	24.8	28.7	33.8	40.9	49.5	61.9	77.8	97.8	115	121
40	0.13	0.77	1.92	3.87	6.49	9.60	12.8	16.1	19.3	22.3	25.3	28.7	32.8	37.3	42.7	47.9	53.6	58.3	60.2
45	0.13	0.71	1.68	3.35	5.55	8.27	11.2	14.1	16.9	19.7	22.3	24.8	27.3	29.9	32.6	35.0	37.2	38.8	39.3
50	0.13	0.64	1.46	2.82	4.64	6.92	9.43	12.0	14.4	16.9	19.2	21.3	23.2	24.9	26.4	27.7	28.7	29.3	29.5
55	0.13	0.57	1.24	2.30	3.77	5.55	7.62	9.77	11.9	13.9	15.9	17.8	19.4	20.8	22.0	22.8	23.5	23.8	23.8
60	0.13	0.51	1.03	1.82	2.94	4.27	5.86	7.57	9.30	11.0	12.6	14.1	15.5	16.7	17.7	18.4	19.0	19.2	19.3
65	0.13	0.44	0.84	1.40	2.18	3.16	4.25	5.47	6.79	8.07	9.32	10.5	11.6	12.6	13.4	14.0	14.4	14.6	14.7
70	0.13	0.37	0.67	1.04	1.53	2.16	2.89	3.68	4.51	5.38	6.25	7.06	7.80	8.46	9.03	9.49	9.82	9.99	10.0
75	0.13	0.32	0.52	0.75	1.03	1.37	1.76	2.21	2.69	3.18	3.67	4.13	4.55	4.95	5.28	5.58	5.80	5.93	5.98
80	0.13	0.25	0.38	0.51	0.66	0.81	0.96	1.14	1.34	1.53	1.75	1.95	2.15	2.32	2.48	2.61	2.71	2.77	2.79
85	0.13	0.20	0.26	0.32	0.38	0.43	0.46	0.49	0.53	0.56	0.61	0.66	0.71	0.76	0.79	0.83	0.85	0.87	0.88
90	0.13	0.14	0.15	0.16	0.17	0.17	0.16	0.15	0.14	0.13	0.14	0.14	0.14	0.15	0.15	0.14	0.13	0.12	0.11

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-05-28

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.02V I:0.5023A P:110.06W PF:0.9960 Freq:60.04Hz Lamp Flux:15839.1x1 lm																		
NAME:PS 100 PRO CR 35 50 7 030									TYPE:					WEIGHT:				
SPEC.:									DIM.:					SERIAL No.:				
MFR.: EVERFINE									SUR.:					Shielding Angle:				

Table--2

UNIT: ×10cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-90	0.16	0.17	0.17	0.17	0.17	0.16	0.15	0.14	0.13	0.14	0.14	0.14	0.15	0.14	0.14	0.13	0.12	0.11	
-85	0.82	0.81	0.78	0.75	0.70	0.64	0.57	0.51	0.45	0.41	0.37	0.33	0.29	0.24	0.19	0.15	0.13	0.11	
-80	2.57	2.50	2.39	2.26	2.08	1.89	1.68	1.47	1.26	1.08	0.90	0.74	0.60	0.46	0.34	0.23	0.14	0.11	
-75	5.58	5.44	5.21	4.91	4.55	4.12	3.66	3.17	2.69	2.24	1.81	1.41	1.07	0.78	0.53	0.34	0.17	0.11	
-70	9.66	9.43	9.07	8.58	7.94	7.20	6.40	5.56	4.71	3.91	3.13	2.40	1.74	1.20	0.78	0.46	0.22	0.11	
-65	14.2	13.9	13.4	12.8	11.9	10.9	9.72	8.50	7.24	5.98	4.77	3.65	2.64	1.74	1.08	0.61	0.27	0.11	
-60	18.9	18.6	18.0	17.2	16.0	14.7	13.3	11.7	10.1	8.41	6.71	5.10	3.67	2.42	1.42	0.76	0.32	0.11	
-55	23.5	23.1	22.4	21.5	20.1	18.5	16.8	14.9	13.0	10.9	8.84	6.74	4.81	3.17	1.83	0.93	0.37	0.11	
-50	28.6	28.0	27.0	25.6	24.0	22.2	20.2	18.1	15.8	13.5	11.0	8.48	6.05	3.97	2.29	1.11	0.43	0.11	
-45	36.9	35.6	33.6	31.1	28.4	25.8	23.4	21.1	18.6	15.9	13.1	10.2	7.33	4.78	2.76	1.30	0.48	0.11	
-40	52.9	49.5	45.1	39.8	34.8	30.4	26.8	23.9	21.1	18.1	15.0	11.8	8.60	5.61	3.23	1.50	0.54	0.11	
-35	99.1	85.7	69.4	55.6	44.8	37.0	31.2	26.9	23.5	20.2	16.8	13.3	9.79	6.42	3.68	1.69	0.58	0.11	
-30	262	207	142	93.8	62.8	46.8	37.1	30.4	25.7	22.1	18.4	14.7	10.9	7.19	4.11	1.88	0.63	0.11	
-25	698	554	354	194	105	63.1	44.8	34.6	28.1	23.7	19.9	15.9	11.8	7.87	4.50	2.04	0.67	0.11	
-20	1412	1131	757	418	194	93.5	56.0	39.4	30.7	25.2	21.0	16.8	12.6	8.46	4.84	2.20	0.71	0.11	
-15	2279	1862	1291	757	352	141	68.2	44.2	33.0	26.5	22.0	17.6	13.3	8.92	5.11	2.31	0.74	0.11	
-10	3101	2542	1860	1128	545	202	83.5	48.5	35.0	27.5	22.7	18.2	13.7	9.25	5.31	2.40	0.76	0.11	
-5	3788	3095	2268	1398	684	254	96.4	52.0	36.3	28.2	23.1	18.6	14.0	9.45	5.43	2.45	0.77	0.11	
0	4127	3285	2393	1485	727	269	101	52.8	36.7	28.4	23.2	18.7	14.1	9.51	5.47	2.46	0.77	0.11	
5	3910	3139	2291	1413	692	260	97.8	52.2	36.5	28.3	23.2	18.6	14.0	9.46	5.45	2.45	0.77	0.11	
10	3196	2670	1930	1161	562	218	85.8	49.3	35.4	27.7	22.8	18.3	13.8	9.29	5.34	2.40	0.76	0.11	
15	2380	1965	1405	816	381	149	70.7	45.2	33.6	26.8	22.2	17.8	13.4	8.98	5.15	2.32	0.74	0.11	
20	1517	1208	833	478	221	101	57.5	40.6	31.3	25.6	21.3	17.1	12.7	8.53	4.88	2.21	0.71	0.11	
25	773	600	401	224	118	67.8	46.7	35.7	28.8	24.2	20.2	16.1	12.0	7.95	4.55	2.06	0.68	0.11	
30	306	236	159	105	69.0	50.4	38.8	31.5	26.4	22.6	18.8	14.9	11.0	7.29	4.16	1.90	0.64	0.11	
35	113	94.4	74.4	59.5	47.5	39.2	32.6	27.7	24.1	20.7	17.2	13.6	9.95	6.53	3.73	1.71	0.59	0.11	
40	57.7	52.6	46.9	41.5	36.2	31.8	27.9	24.7	21.7	18.6	15.4	12.1	8.77	5.73	3.28	1.52	0.54	0.11	
45	38.5	36.8	34.4	31.8	29.1	26.6	24.2	21.7	19.1	16.3	13.4	10.5	7.51	4.89	2.80	1.32	0.49	0.11	
50	29.2	28.4	27.2	25.8	24.3	22.7	20.8	18.6	16.3	13.8	11.3	8.73	6.23	4.05	2.33	1.14	0.44	0.11	
55	23.6	23.2	22.5	21.5	20.3	18.9	17.2	15.3	13.3	11.3	9.13	6.98	4.96	3.25	1.88	0.96	0.38	0.11	
60	19.1	18.7	18.1	17.2	16.2	15.0	13.6	12.0	10.4	8.74	6.99	5.31	3.78	2.48	1.47	0.78	0.33	0.11	
65	14.5	14.2	13.7	12.9	12.1	11.1	10.0	8.87	7.61	6.30	4.99	3.79	2.73	1.81	1.12	0.63	0.28	0.11	
70	9.90	9.63	9.23	8.71	8.11	7.43	6.69	5.86	4.98	4.10	3.27	2.50	1.83	1.26	0.82	0.48	0.23	0.11	
75	5.86	5.67	5.40	5.05	4.69	4.27	3.82	3.34	2.85	2.37	1.90	1.49	1.14	0.83	0.57	0.35	0.18	0.11	
80	2.73	2.64	2.51	2.34	2.16	1.97	1.76	1.55	1.33	1.14	0.96	0.79	0.65	0.51	0.37	0.24	0.14	0.11	
85	0.85	0.82	0.78	0.73	0.68	0.63	0.58	0.52	0.47	0.44	0.40	0.36	0.32	0.27	0.21	0.16	0.13	0.11	
90	0.12	0.12	0.12	0.13	0.13	0.13	0.12	0.12	0.12	0.12	0.13	0.14	0.14	0.14	0.14	0.13	0.12	0.11	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-05-28

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks: