



Uždaroji akcinė bendrovė

Įmonės kodas 303287697, PVM mokėtojo kodas LT100008526416

Kalvarijų g. 125 korp. 3, LT-08221 Vilnius, Lietuva

Tel. +370-680-90900, +370-653-88885

el. p. ledmada@gmail.com, web: www.ledmada.lt

Sąskaita LT947300010138949797, bankas „Swedbank“ AB, Vilnius, SWIFT: HABA LT 22

Product Name: LED Constant Current Power Supply

Product Model: HG-WP22150

Product Specification: 25-40V/1.75~3.5A

#### KEY FEATURES

Input range:100-265VAC

Built-in active PFC function

Free Air Convection

High efficiency up to 90%

No load power consumption<2W

Protections: short circuit/overload/over voltage/

Over temperature

IP67 design for outdoor installations

Dimension: 220\*68\*40MM

non flicker power drivers

5-Years Product Warranty

#### Model List

Model	Output Current	Output Voltage Range	No load output voltage	Efficiency	Power Factor
HG-WP22150	1.75~3.5A	25V-40V	45Vmax	90%	$\geq 0.95$

# LED MADA®

Uždaroji akcinė bendrovė

Įmonės kodas 303287697, PVM mokėtojo kodas LT100008526416

Kalvarijų g. 125 korp. 3, LT-08221 Vilnius, Lietuva

Tel. +370-680-90900, +370-653-88885

el. p. ledmada@gmail.com, web: www.ledmada.lt

Sąskaita LT947300010138949797, bankas „Swedbank“ AB, Vilnius, SWIFT: HABA LT 22



## 二、 ELECTRICAL SPECIFICATIONS

Parameter Note.1		Specification
Input	Range of input voltage	100-265VAC
	Frequency(Hz)	47-63 Hz
	Inrush Current	65A <sub>max.</sub> @Full Load,230VAC,Cold Start
	Input Current max	2.0A <sub>max.</sub> @Full Load,100VAC
	Start-up time	<2S @Full Load,230VAC
	No Load Power Consumption	<2W @230VAC
	Power Factor	PF ≥ 0.95 @Full Load,230VAC
	THD	20%MAX@70%-100%Load,100-265VAC

# LED MADA®

Uždaroji akcinė bendrovė

Įmonės kodas 303287697, PVM mokėtojo kodas LT100008526416

Kalvarijų g. 125 korp. 3, LT-08221 Vilnius, Lietuva

Tel. +370-680-90900, +370-653-88885

el. p. ledmada@gmail.com, web: www.ledmada.lt

Sąskaita LT947300010138949797, bankas „Swedbank“ AB, Vilnius, SWIFT: HABA LT 22

Output	Output Voltage	1750~3500mA . @100-265VAC
	Current current	25-40VDC
	Current Accuracy	±5%
	Line Regulation	±3%
	Load Regulation	≤5% @Full Load,100-265VAC
	Hold-up Time	10ms Min
	Ripple & Noise(max)Note.2	10% (Pk-Pk)
	Efficiency(Type)	90% @Full Load,230VAC;

Protection	Over Load Protection	Protection type: Auto recovery
	Over Voltage Protection	Protection type: Auto recovery
	Short circuit Protection	Protection type: Hiccup, Auto recovery
	Over Temperature	Protection type: Auto recovery

Safety&EMC	Safety standards	EN61347-1:2015 EN61347-2-13:2014
	Input-Output(V.AC)	3000V/5mA/1min
	Input-FG(V.AC)Note.3	1500V/5mA/1min
	Output-FG(V.AC)	NA
	Leakage Current	<0.7 mA(240VAC)
	Input-Output(V.AC)	≥4 M Ω @500VDC
	Input-FG(V.AC)	≥2 M Ω @500VDC
	Output-FG(V.AC)	≥2 M Ω @500VDC
	EMI(Conducted&Radiated Emission)Note.4	EN55015:2013+A1:2015 EN61000-3-2:2014 EN61000-3-3:2013
	EMS	EN61547:2009

Environment	Working Temperature	Ta=-40°C...+60°C(Refer to output load derating curve)
	Max. Case Temperature Tc	Tc=+85°C
	Case temperature on warrenty	Tc: -40°C...+75°C
	Cooling condition	Free Air Convection
	Storage Temperature	-25°C...+80°C

# LED MADA®

Uždaroji akcinė bendrovė

Įmonės kodas 303287697, PVM mokėtojo kodas LT100008526416

Kalvarijų g. 125 korp. 3, LT-08221 Vilnius, Lietuva



Tel. +370-680-90900, +370-653-88885

el. p. ledmada@gmail.com, web: www.ledmada.lt

Sąskaita LT947300010138949797, bankas „Swedbank“ AB, Vilnius, SWIFT: HABA LT 22

Life Time	50000Hrs@Full Load,230VAC,Tc=75 °C
Humidity	20-90%RH
MTBF	>250,000h@25 °C (MIL-HDBK-217F)
Vibration	10-500Hz,2G10min./1cycle,60min.eachalongX,Y,Zaxes
Dimension	220*68*40mm
Weight	1.00Kg&1PCS

Note	<p>Note.1:All parameter NOT specially mentioned are measured are rated input or max rated input ,and 25°C of ambient temperature.<b>Note.2:Ripple &amp; Noise are measured at 20MHz of bandwidth by using a 300mm twisted pair-wrie terminated with a 0.1uF parallel capacitor.</b><b>Note.3:Please remove gas discharge tube on input end when do input hi-pot tests to ground,to avoid functional movement of gas discharge tube.</b></p> <p><b>Note.4:Please confirm EMI with whole system ,only driver can pass EMI standard,.</b></p>
------	--

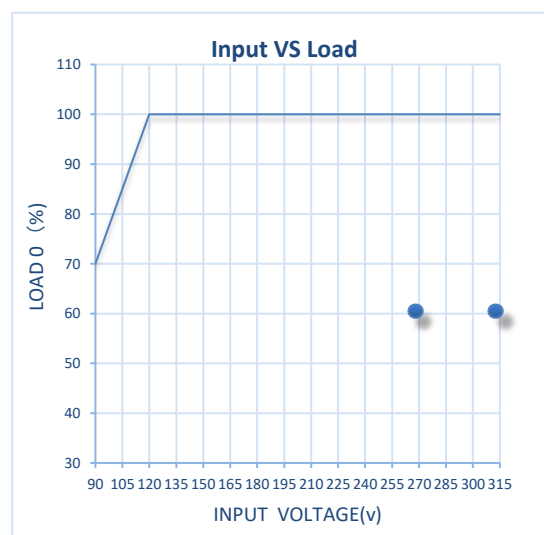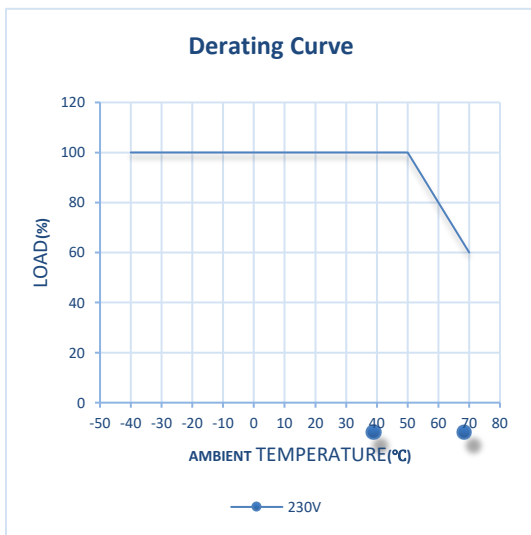

# LED MADA®

Uždaroji akcinė bendrovė

Įmonės kodas 303287697, PVM mokėtojo kodas LT100008526416

Kalvarijų g. 125 korp. 3, LT-08221 Vilnius, Lietuva

Tel. +370-680-90900, +370-653-88885

el. p. ledmada@gmail.com, web: www.ledmada.lt

Sąskaita LT947300010138949797, bankas „Swedbank“ AB, Vilnius, SWIFT: HABA LT 22

